

IN-FLOOR SAFES

Common Features

- Door constructed of 1/2" thick A36 steel plate
- An additional independent spring-loaded reloading device, activated by a punching attack for models B1500 and above
- Body-"B" rate construction with large storage capacity and flush cover plate for total concealment under a carpet.
- 1/4" exterior bottom flange and powder coat
- UL group II 3-wheel combination lock

Hinges Spring

HS-101




Dial / Digital Lock

FS-1014C / 1014E

Outside A 14.84". B 9.57". C 10.06".
 Inside C 9.3". B 9". A 9.7",
 Weight 48.4 Lbs.

Supplied with S+G combination or LP electronic Lock

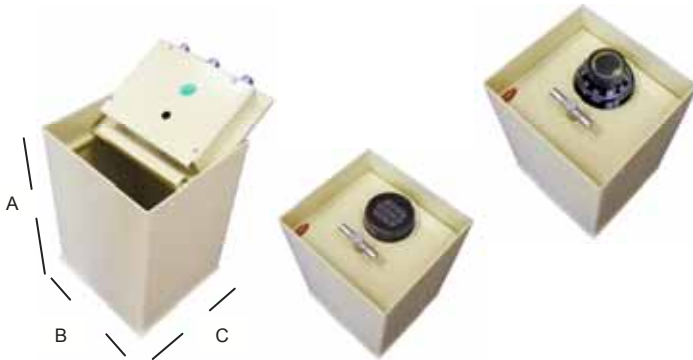


Dial / Digital Lock

FS-1014S

Outside A 14.84", B 9.57, C 10.06"
 Inside A 9.7", B 9", C 9.3"
 Weight 48.4 Lbs.

Supplied with S+G combination or LP electronic Lock

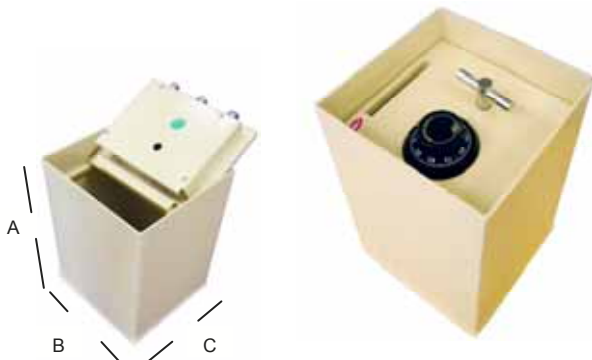


Dial / Digital

Lock


B 1600 / 1600S

Outside A 16.4", B 12.8", C 14.6"
 Inside A 11.3", B 12", C 14"
 Weight 106 Lbs.
 Deposit H 0.5", W 5.5"

Supplied with S+G combination or LP electronic Lock



B 1600



B 1600S

Dial / Digital Lock


B 1500C / 1500E

Outside A 12.75", B 14.6", C 12.7"
 Inside A 8", B 14.2", C 11.9"
 Weight 104 Lbs.

Supplied with S&G combination Or LP electronic Lock



B 1500E



B 1500C

Dial / Digital Lock


B 1806C / 1806E

Outside A 9", B 12.7", C 19"
 Inside A 6", B 12.3", C 18.5"
 Weight 110 Lbs.

Supplied with S&G combination Or LP electronic lock



B 1806E

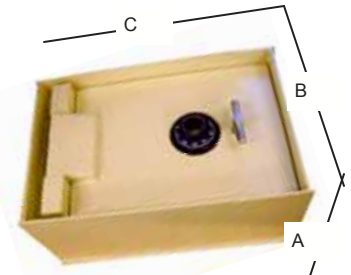

B 1806C

POLYETHYLENE IN-FLOOR


Common Features

- Interchangeable Door
- 1/2" Solid steel door w/large stainless steel flat locking system
- Patented, spring-assisted lift-off door
- Patented polyethylene body is rustproof and leak resistant
- Dual relock system
- Drill resistive hard plate
- UL listed combination lock
- Carpeted floor
- 1/4" thick door collar bolted to the body on all 4-sides using specially hardened bolts
- 1/2" thick door frame welded to the door collar
- Versatile storage system
- Protection against Fire, Burglary & Leakage
- False floor for FS-4000B

DIAL COMBINATION LOCK

FS-2300B

Outside: H 15", W 18.5", D 15.5"
Inside: H 12", W 17", D 12.25"
Weight: 80 Lbs.
Capacity: 1.5 cub. feet

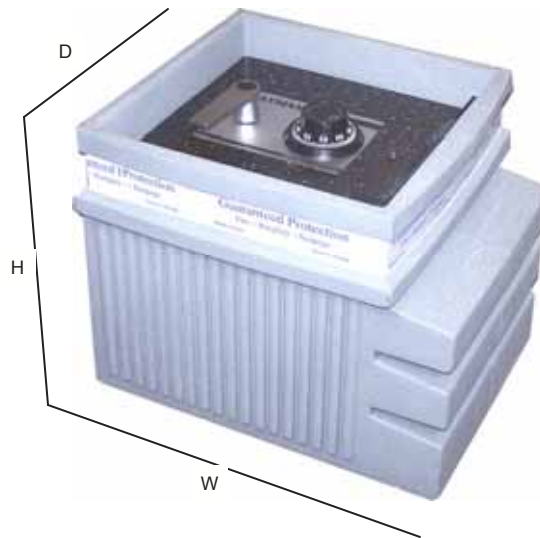

DIAL COMBINATION LOCK

FS-4000B

Outside: H 20.25", W 21.8", D 15.5"
Inside: H 17.25", W 20.25", D 12.5"
Weight: 86 Lbs.
Capacity: 2.5 cub. feet

